



# TUBE CARRÉ 1.0

INSTALLATION INSTRUCTIONS | DECEMBER 2022

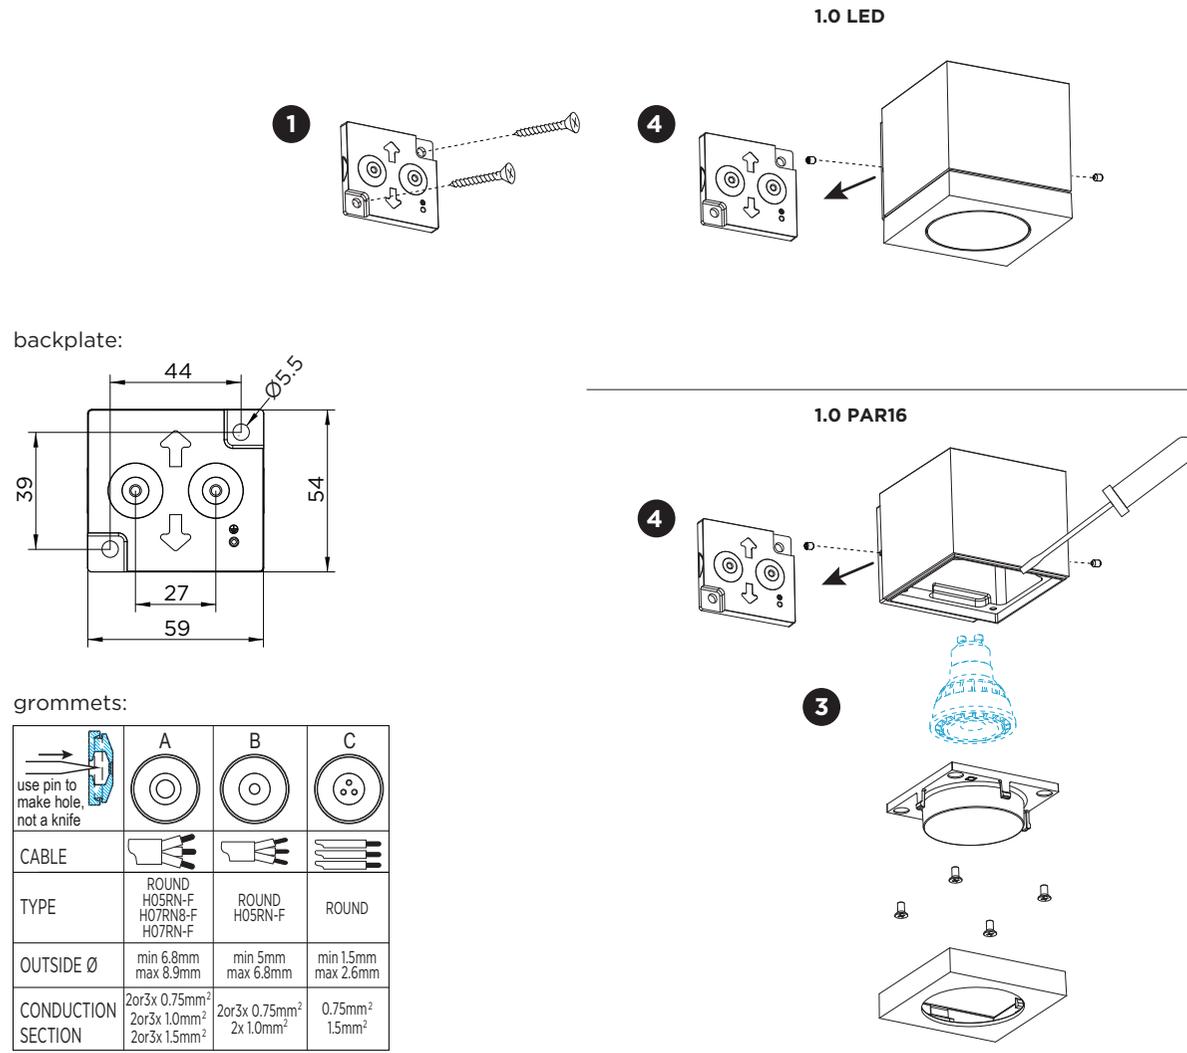

## DIMENSIONS

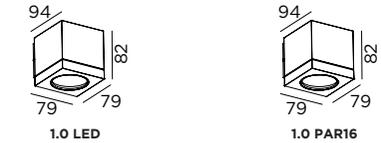

## MOUNTING INSTRUCTION

**1** Remove the backplate by loosening the socket screws and fix it to the wall with screws (screws are not included).


## 2 POWER CONNECTION

Connect to 220-240V. Connect the earth cable.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

for example:

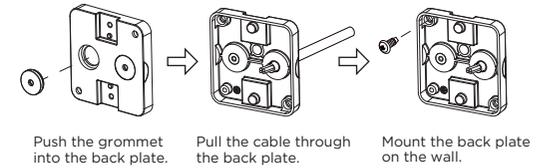


**3** For PAR16 version:  
 a. Open the cover with a flat screwdriver.  
 b. Loosen the four screws of the glass cover and remove it.  
 c. Insert the lamp.  
 d. Put back the glass cover with the four screws.  
 e. Place back the body cover by pushing.

**4** Mount the luminaire on the backplate with the socket screws.

PB19-010-548-00\_V2

# TUBE CARRÉ 1.0


INSTALLATION INSTRUCTIONS | DECEMBER 2022

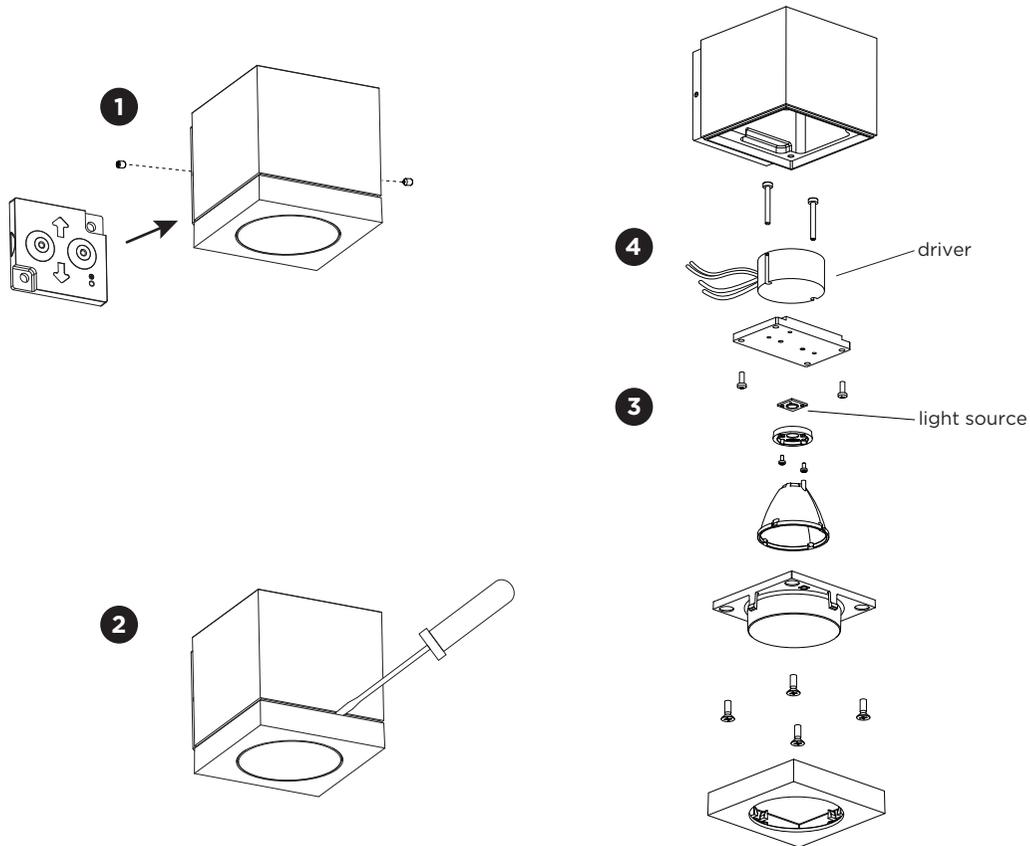

## DISMOUNTING AND RECYCLING INSTRUCTIONS

### Light source & driver

- 1 Disconnect the fixture from the wall by loosening the socket screws and the wiring.
- 2 Remove the cover with a flat screwdriver.
- 3 Unscrew the glass cover, remove the reflector and unscrew the holder to remove the light source.
- 4 Unscrew the plate and loosen the wires and screws to remove the driver.



The light source is replaceable by an authorized professional.  
For advice contact your Wever & Ducre customer service contact point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class F.