




MULTINOVA 30 TW 930 ADM DIM5
B

27933 9005 B

AVAILABLE IN
BLACK 27933 9005 B
WHITE 27933 9005 W

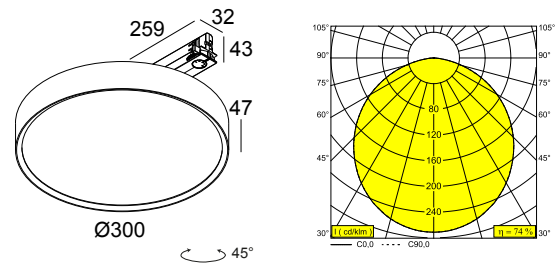

 [View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.5
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC SBL 3F MULTI DIMMABLE POWER ADAPTER - (DALI DT8)

Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 2700K: LED cluster 9,4W / CRI>90 (R9: 63) / 2700K-6500K / 1338lm Or @ 6500K: LED cluster 9,4W / CRI>90 (R9: 81) / 2700K-6500K / 1428lm
SDCM	SDCM3
RISKGROUP	RG0
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	@ 2700K: 1338lm // 9,4W // 142lm/W Or @ 6500K: 1428lm // 9,4W // 152lm/W
LED TECHNICS (LUMINAIRE)	@ 2700K: 993lm // 11W // 92lm/W Or @ 6500K: 1059lm // 11W // 98lm/W

Requirements
TRACK 3F DIM

⌘ DELTALIGHT®

MULTINOVA 30 TW 930 ADM DIM5 B

27933 9005 B

For detailed installation instructions, please consult the manual: [27933_XXX5_HAND.pdf](#)

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	 
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	 
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	 

Notes: