

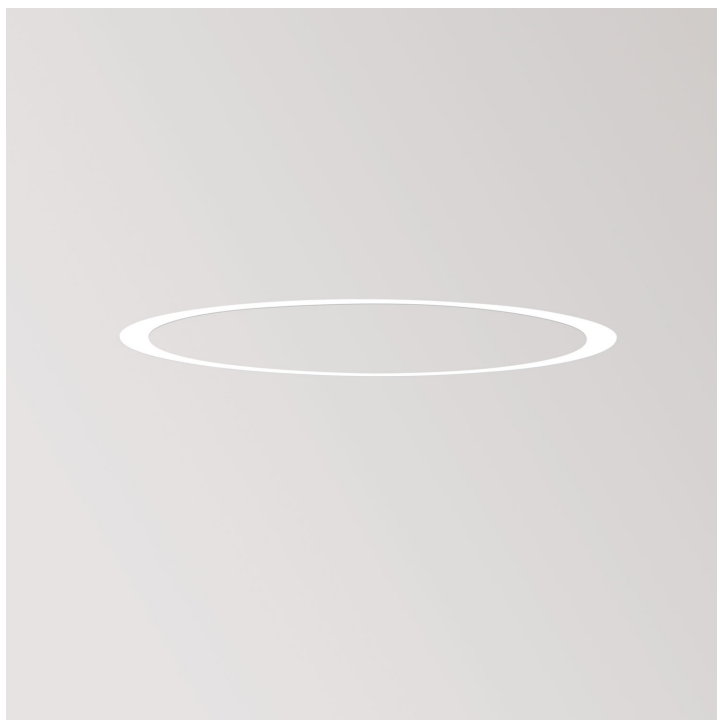




SUPER-OH! 70 SBL TRIMLESS 930 DIM1

20729 9301



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 735
RECESSED DEPTH (MM)	150
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	8.6
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC SBL INCL.CENTER BOARD MDF INCL.DIMMABLE LED POWER SUPPLY

Electrical info

ELECTRICAL	220-240V / 0 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	1-10V
ENERGY CLASS	D

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 44,1W / CRI>90 (R9: 50) / 3000K / 6476lm
TM-30 VALUES	Rf: 92 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
LED TECHNICS (LIGHT SOURCE)	6476lm // 44,1W // 147lm/W
LED TECHNICS (LUMINAIRE)	3064lm // 51W // 60lm/W

Options

WIRELESS CONTROL 5A DIM1

 DELTALIGHT®

SUPER-OH! 70 SBL TRIMLESS 930 DIM1
20729 9301


For detailed installation instructions, please consult the manual: [20729_XXX1_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-

FINISH YOUR SPECIFICATION

Miscellaneous control equipment



300 90 016 ED1 WIRELESS CONTROL 5A DIM1

☐

Notes: