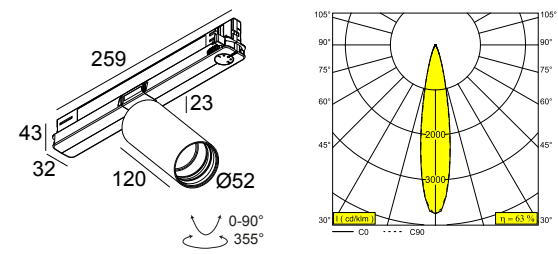




SPY 52 SOFT 93020 ADM DIM5 B
 19844 9025 B

AVAILABLE IN
BLACK 19844 9025 B
FULL WHITE 19844 9025 FW
WHITE 19844 9025 W




[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.9
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° 3F MULTI DIMMABLE POWER ADAPTER 500mA Optional REFLECTORS 30° & 45° available

Electrical info

ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	650lm // 12W // 55lm/W

Requirements

SPY 52 TUBE
 TRACK 3F DIM

Accessories

HONEYCOMB 42
 SPREAD LENS 42
 LINEAR SPREAD LENS 42
 SOFTENING LENS 42
 GLASS SBL 42



SPY 52 SOFT 93020 ADM DIM5 B

19844 9025 B






For detailed installation instructions, please consult the manual: [19844_XXX5_HAND.pdf](#)

SPY 52 SOFT 93020 ADM DIM5 B

19844 9025 B

FINISH YOUR SPECIFICATION

Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	19810 0020 LINEAR SPREAD LENS 42	☐
	19810 0030 SPREAD LENS 42	☐
	19810 0040 SOFTENING LENS 42	☐
	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐



SPY 52 SOFT 93020 ADM DIM5 B

19844 9025 B

Finish your product

 40 19810 0100 B SPY 52 TUBE B	☐
19810 0100 FBR SPY 52 TUBE FBR	☐
19810 0100 FG SPY 52 TUBE FG	☐
19810 0100 GC SPY 52 TUBE GC	☐
19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

 18 19810 0180 SPY 52 REFLECTOR 20°	☐
 18 19810 0190 SPY 52 REFLECTOR 45°	☐
 18 19810 0240 SPY 52 REFLECTOR 30°	☐

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	 
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	 
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	 

Notes: