



SPY 52 TRIMLESS SOFT 93020 B

19896 9020 B

AVAILABLE IN

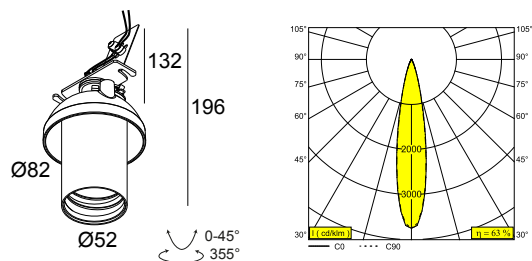
BLACK 19896 9020 B

FLEMISH BRONZE 19896 9020 FBR

FLEMISH GOLD 19896 9020 FG

GOLD COLOURED 19896 9020 GC

WHITE 19896 9020 W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	80
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.DIMMABLE LED POWER SUPPLY 500mA-DC Optional REFLECTORS 30° & 45° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	650lm // 12W // 55lm/W

Requirements

SPY 52 TUBE

MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.

MOUNTING KIT AIR 103

LED POWER SUPPLY 500mA-DC DIM (Remote)

SPY 52 TRIMLESS SOFT 93020 B

19896 9020 B

Accessories

- HONEYCOMB 42
- SPREAD LENS 42
- LINEAR SPREAD LENS 42
- SOFTENING LENS 42
- GLASS SBL 42

For detailed installation instructions, please consult the manual: [19896_XXX0_HAND.pdf](#)










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit		
 System ceiling		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Plasterboard		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Stucanet		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Concrete + plaster		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Lintel + plaster		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster		MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	Required
 Stretched ceiling		MOUNTING KIT SPY 39/52 TRIMLESS CSC	Required
		MOUNTING KIT SPY 39/52 TRIMLESS WSC	Required

SPY 52 TRIMLESS SOFT 93020 B


19896 9020 B

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63	LED POWER SUPPLY MULTI-POWER DIM9	1->3(3) ☐
	300 90 68	LED POWER SUPPLY MULTI-POWER DIM5	1->2(1) ☐
	300 90 69	LED POWER SUPPLY MULTI-POWER HV DIM9	1->5(3) ☐
	300 90 124	LED POWER SUPPLY MULTI-POWER DIM7	1(1) ☐
	300 90 125	LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) ☐
	21012 0010	LED POWER SUPPLY MULTI POWER	1->2 ☐
	21012 0021	LED POWER SUPPLY MULTI POWER DIM1	1->2 ☐
	21012 0035	LED POWER SUPPLY MULTI POWER DIM5	1->2 ☐
	21012 005W	LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2 ☐


SPY 52 TRIMLESS SOFT 93020 B

19896 9020 B




21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

1




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

2->2



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->2




Mounting kits



15212 2030 MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.



Mounting kits stretched ceiling



15212 0080 MOUNTING KIT SPY 39/52 TRIMLESS CSC



15212 0160 MOUNTING KIT SPY 39/52 TRIMLESS WSC








 DELTALIGHT®

SPY 52 TRIMLESS SOFT 93020 B

19896 9020 B

Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	19810 0020 LINEAR SPREAD LENS 42	☐
	19810 0030 SPREAD LENS 42	☐
	19810 0040 SOFTENING LENS 42	☐
	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐



SPY 52 TRIMLESS SOFT 93020 B

19896 9020 B

Finish your product

 40 19810 0100 B SPY 52 TUBE B	☐
19810 0100 FBR SPY 52 TUBE FBR	☐
19810 0100 FG SPY 52 TUBE FG	☐
19810 0100 GC SPY 52 TUBE GC	☐
19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

 18 19810 0180 SPY 52 REFLECTOR 20°	☐
 18 19810 0190 SPY 52 REFLECTOR 45°	☐
 18 19810 0240 SPY 52 REFLECTOR 30°	☐

Notes: