




LOGIC 190 R REFL HONEYCOMB 92718 INOX

30226 9210 INOX

AVAILABLE IN
INOX 30226 9210 INOX

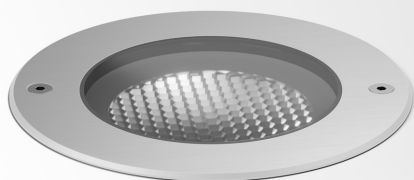

[View on website](#)

General info

LOCATION	outdoor
INSTALLATION	Floor Recessed
CUTOUT SHAPE/SIZE (MM)	round - BOX
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP67
PROTECTION AGAINST MECHANICAL IMPACT	IK10
WEIGHT (KG)	2
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR SP-18° INCL.LED POWER SUPPLY 400mA-DC INCL.HONEYCOMB INCL.1 x CABLE H05 RN-F 3 x 0.75mm ² 0,5m INCL.IP68 CONNECTOR 3P ESG 10mm max.500kg

Electrical info

ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 13W / CRI>90 (R9: 60) / 2700K / 1775lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1775lm // 13W // 137lm/W
LED TECHNICS (LUMINAIRE)	1125lm // 15W // 75lm/W

Requirements

LOGIC 190 R BOX

LOGIC 190 R REFL HONEYCOMB 92718 INOX

30226 9210 INOX


Options

LOGIC 190 ANTI VANDAL SCREWS 2 PCS

For detailed installation instructions, please consult the manual: [30226_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Ground mounting boxes




30210 0010 LOGIC 190 R BOX

☐

Waterproof connection parts




431 99 02 IP68 JUNCTION BOX 4P

☐

21034 0150 IP68 Y-CONNECTOR 5P

☐

Other



30210 0020 LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐



LOGIC 190 R REFL HONEYCOMB 92718 INOX

30226 9210 INOX

Notes: