

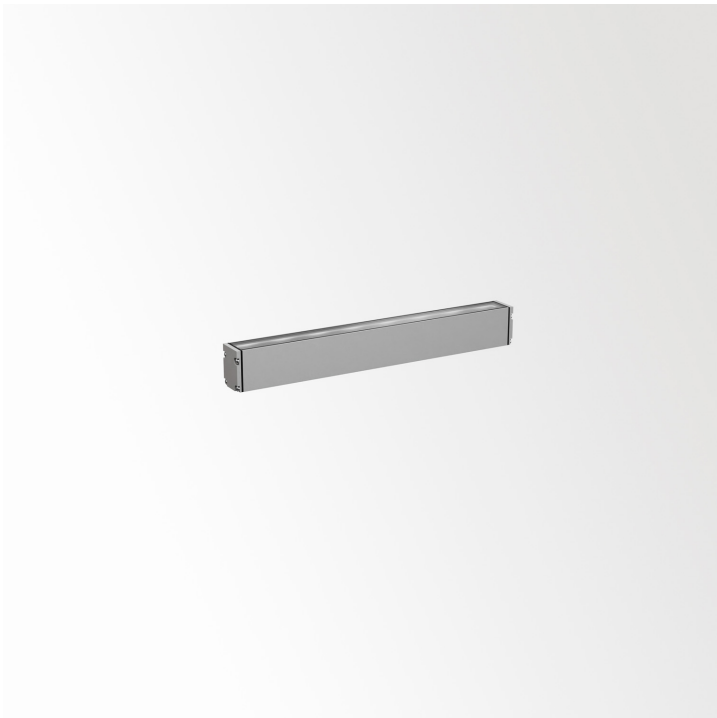




**LOGIC LINEAR ON 440  
WALLGRAZER 927 DIM5 A**  
30829 9205 A

AVAILABLE IN  
**ALU GREY** 30829 9205 A  
**BLACK** 30829 9205 B  
**FLEMISH BRONZE OUTDOOR** 30829 9205 FBRX  
**ANTHRACITE (DARK GREY)** 30829 9205 N  
**WHITE** 30829 9205 W



 [View on website](#)

| General info                         |                                                                         |
|--------------------------------------|-------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                 |
| INSTALLATION                         | Floor Surface mounted,Wall Surface mounted                              |
| INGRESS PROTECTION                   | IP67                                                                    |
| PROTECTION AGAINST MECHANICAL IMPACT | IK07                                                                    |
| WEIGHT (KG)                          | 1                                                                       |
| INFORMATION                          | 8 x WALLGRAZER LENS<br>EXCL.LED POWER SUPPLY 48V-DC<br>DALI DT8 dimming |

| Electrical info |        |
|-----------------|--------|
| ELECTRICAL      | 48V-DC |
| CLASS           | III    |
| DIM TYPE        | DALI   |
| ENERGY CLASS    | F      |

| Lightsource info            |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 14,4W / CRI>90 (R9: 50) / 2700K / 1644lm |
| TM-30 VALUES                | Rf: 91 / Rg: 100                                     |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| LED TECHNICS (LIGHT SOURCE) | 1644lm // 14,4W // 111lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 1143lm // 17W // 69lm/W                              |

| Requirements              |  |
|---------------------------|--|
| WALL BRACKET SET          |  |
| FLOOR BRACKET SET         |  |
| IP68 CABLE + CONNECTOR 5P |  |
| LED POWER SUPPLY 48V-DC   |  |

## LOGIC LINEAR ON 440 WALLGRAZER 927 DIM5 A

30829 9205 A

### Options

---


THROUGH WIRING SET IP68

For detailed installation instructions, please consult the manual: [30829\\_XXX5\\_HAND.pdf](#)

LOGIC LINEAR ON 440 WALLGRAZER 927 DIM5 A  
30829 9205 A

FINISH YOUR SPECIFICATION

LED power supplies #



**21032 0390** LED POWER SUPPLY 48V-DC / 90W

5

Fixation components




**30810 0040 INOX** WALL BRACKET SET 60 INOX

**30810 0040 N** WALL BRACKET SET 60 N



**30810 0050 INOX** WALL BRACKET SET 100 INOX



**30810 0060 INOX** WALL BRACKET SET 200 INOX



**30810 0070 INOX** FLOOR BRACKET SET INOX

LOGIC LINEAR ON 440 WALLGRAZER 927 DIM5 A  
30829 9205 A

Electric connection parts



**30810 0080** IP68 CABLE + CONNECTOR 5P - 0,5m

☐

**30810 0090** IP68 CABLE + CONNECTOR 5P - 2m

☐

**30810 0100** THROUGH WIRING SET IP68 440

☐

Notes: