

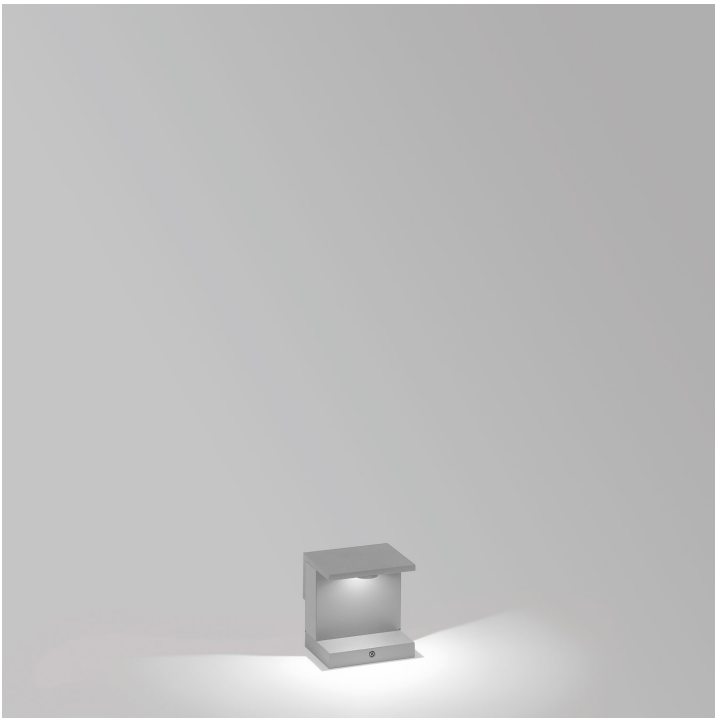




OBLIX F 15 927 A

15117 9200 A

AVAILABLE IN
ALU GREY 15117 9200 A
ANTHRACITE (DARK GREY) 15117 9200 N



[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP55
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	1.9
ADJUSTABILITY	non adjustable
INFORMATION	INCL.LED POWER SUPPLY 350mA-DC

Electrical info

ELECTRICAL	120-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	548lm // 7W // 82lm/W


Options

- PIN 18
- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P


For detailed installation instructions, please consult the manual: [15117_XXXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Waterproof connection parts



216 12 00 CBOX

☐

216 12 01 IP68 CONNECTION KIT

☐

216 12 02 IP68 CONNECTOR 3P

☐

Pins and plates for bollards



15222 0180 PIN 18

☐

Notes: