




SPIX P100-3 92710 N
29718 9210 N

AVAILABLE IN
ANTHRACITE (DARK GREY) 29718 9210 N
PINE GREEN 29718 9210 PGR

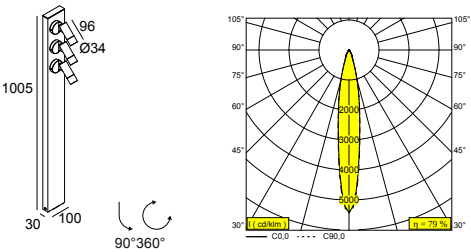

 [View on website](#)

General info

LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK05
WEIGHT (KG)	2.4
ADJUSTABILITY	90° swiveling, 360° rotatable
INFORMATION	LENS 10° INCL.LED POWER SUPPLY 700mA-DC

Electrical info

ELECTRICAL	100-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	3 x (LED cluster 2W / CRI>90 (R9: 55) / 2700K / 220lm)
TM-30 VALUES	rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
LED TECHNICS (LIGHT SOURCE)	660lm // 6W // 110lm/W
LED TECHNICS (LUMINAIRE)	519lm // 7W // 75lm/W

Requirements

PIN 11
PLATE 12


Options

CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

For detailed installation instructions, please consult the manual: [29718_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Waterproof connection parts



216 12 00

CBOX


☐



216 12 01

IP68 CONNECTION KIT

☐




216 12 02

IP68 CONNECTOR 3P

☐


Pins and plates for bollards



229 01 11

PIN 11

☐



15223 0120 N

PLATE 12 N

☐

Notes: