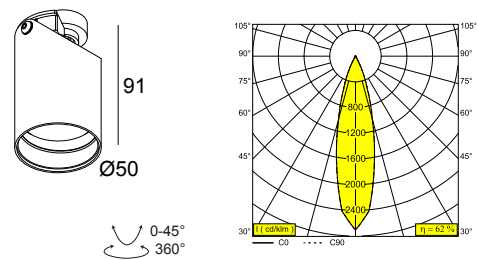




PUT S6 MAGNETIC 92724
12817 9220



[View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - BOX
RECESSED DEPTH (MM)	105
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	0° to 45° swiveling, 360° rotatable
INFORMATION	REFLECTOR FL-24° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	641lm // 10W // 65lm/W

Requirements
LED POWER SUPPLY 350 / 500mA-DC DIM

Accessories
PUT S6 HONEYCOMB
PUT S6 SOFTENING LENS



PUT S6 MAGNETIC 92724










12817 9220

For detailed installation instructions, please consult the manual: [**12817_XXXX_HAND.pdf**](#)

PUT S6 MAGNETIC 92724


12817 9220

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(1) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(1) / 1(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2 / 1->2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐


PUT S6 MAGNETIC 92724

12817 9220




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->2 / 1->2

☐



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1-2(2)

☐



21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1-2(1)

☐


21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1


☐


21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1

☐

Light altering devices




12820 0050 B PUT S6 HONEYCOMB B

☐


12820 0090 PUT S6 SOFTENING LENS

☐

Hole In One case for Put



12816 0000 HOLE IN ONE S6

☐



PUT S6 MAGNETIC 92724

12817 9220

Notes: