




SUPERNOVA FLAT 65 930 B
20631 9300 B

AVAILABLE IN
BLACK 20631 9300 B
WHITE 20631 9300 W

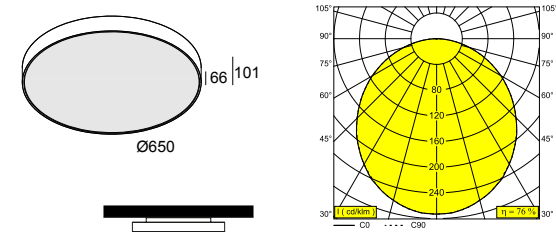

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted,Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	9
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC SBL INCL.ADJUSTABLE LED POWER SUPPLY - 2 settings: 1- 1400mA 2- 930mA

Electrical info	
ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 1400mA: LED cluster 58,5W / CRI>90 (R9: 68) / 3000K / 7776lm Or @ 930mA: LED cluster 37,4W / CRI>90 (R9: 68) / 3000K / 5360lm
TM-30 VALUES	Rf: 89 / Rg: 97 @ 930mA: rf: 89 / Rg: 97
SDCM	SDCM3
RISKGROUP	RG0
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	@ 1400mA: 7776lm // 58,5W // 132lm/W Or @ 930mA: 5360lm // 37,4W // 144lm/W
LED TECHNICS (LUMINAIRE)	@ 1400mA: 5928lm // 67W // 88lm/W Or @ 930mA: 4086lm // 43W // 95lm/W

SUPERNOVA FLAT 65 930 B

20631 9300 B

Options

SUSPENSION SET 25 3m

CABLE BASE R / S

COVERSET R 62-90-100 / S 62-80-90

CENTRAL ROD SUSPENSION SUPERNOVA FLAT 1m

CENTRAL SUSPENSION SUPERNOVA FLAT


For detailed installation instructions, please consult the manual: [20631_XXX0_HAND.pdf](#)

SUPERNOVA FLAT 65 930 B

20631 9300 B

FINISH YOUR SPECIFICATION

Current supply



203 99 55 ANO

CABLE BASE R ANO

☐

203 99 55 B

CABLE BASE R B

☐

203 99 55 W

CABLE BASE R W

☐



203 99 56 ANO

CABLE BASE S ANO

☐

203 99 56 B

CABLE BASE S B


☐

203 99 56 W

CABLE BASE S W

☐

Coversets



204 00 100 B

COVERSET R 100 B

☐

204 00 100 W


COVERSET R 100 W

☐

SUPERNOVA FLAT 65 930 B

20631 9300 B


Suspension parts




274 97 10 B CENTRAL ROD SUSPENSION SUPERNOVA FLAT 1m B

☐

274 97 10 W CENTRAL ROD SUSPENSION SUPERNOVA FLAT 1m W

☐

328 25 43 SUSPENSION SET 25 3m

☐

328 26 23 B CENTRAL SUSPENSION SUPERNOVA FLAT 3m B

☐

328 26 23 W CENTRAL SUSPENSION SUPERNOVA FLAT 3m W

☐

Electric connection parts



15225 0360 B CONNECTION ST B

☐

15225 0360 W CONNECTION ST W

☐

Notes: