




ENTERO RD-S TRIMLESS TW 96520
B

28427 9020 B

AVAILABLE IN
BLACK 28427 9020 B
FULL WHITE 28427 9020 FW
GOLD COLOURED 28427 9020 GC
WHITE 28427 9020 W

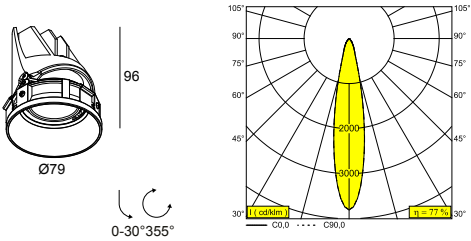

 [View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	105
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.235
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL. LED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 30° & 45° available

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	835lm // 10W // 81lm/W

Requirements	
MOUNTING KIT ENTERO ROUND S	
MOUNTING KIT AIR 105	
LED POWER SUPPLY 500mA-DC TW (Remote)	

ENTERO RD-S TRIMLESS TW 96520 B

28427 9020 B

Accessories

ENTERO S HONEYCOMB
ENTERO S LINEAR SPREAD LENS
ENTERO S SPREAD LENS
ENTERO S SOFTENING LENS
ENTERO S GLASS SBL

For detailed installation instructions, please consult the manual: [28427_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Plasterboard	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Stucanet	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Wood	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT ENTERO RD-S O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT ENTERO RD-S CSC	Required
	 MOUNTING KIT ENTERO RD-S WSC	Required
 Ventilation in plasterboard	 MOUNTING KIT SIDE AIR ONLY 1	Required
	 MOUNTING KIT SIDE AIR 105	Required
	 MOUNTING KIT NO AIR 105	Required
 Ventilation in concrete + plaster	 MOUNTING KIT NO AIR 105	Required
	 MOUNTING KIT TOP AIR 105	Required
	 MOUNTING KIT TOP AIR ONLY 1	Required


ENTERO RD-S TRIMLESS TW 96520 B

28427 9020 B

FINISH YOUR SPECIFICATION

LED power supplies

#



21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

1->2

☐

Mounting kits




28400 0010 MOUNTING KIT ENTERO RD-S O.F.A.

☐


28500 0220 MOUNTING KIT DEEP ENTERO RD-S TRIMLESS

☐

Mounting kits stretched ceiling




28400 0070 MOUNTING KIT ENTERO RD-S CSC

☐


28400 0130 MOUNTING KIT ENTERO RD-S WSC

☐

Mounting kits side air + light




29810 0110 MOUNTING KIT SIDE AIR 105

☐

ENTERO RD-S TRIMLESS TW 96520 B

28427 9020 B

Mounting kits top air + light




29810 0130

MOUNTING KIT TOP AIR 105

☐

Mounting kits side air only




29810 0100

MOUNTING KIT SIDE AIR ONLY 1

☐

Mounting kits top air only




29810 0200

MOUNTING KIT TOP AIR ONLY 1

☐

Mounting kits no air



29810 0120




MOUNTING KIT NO AIR 105

☐

 DELTALIGHT[®]

ENTERO RD-S TRIMLESS TW 96520 B
28427 9020 B


Light altering devices

	28500 0010	ENTERO S LINEAR SPREAD LENS	☐
	28500 0020	ENTERO S SPREAD LENS	☐
	28500 0030	ENTERO S SOFTENING LENS	☐
	28500 0040	ENTERO S GLASS SBL	☐
	28500 0050 B	ENTERO S HONEYCOMB SINGLE USE B	☐
	28500 0060 B	ENTERO S HONEYCOMB DOUBLE USE B	☐


ENTERO RD-S TRIMLESS TW 96520 B

28427 9020 B


Replaceable reflector / lens



19810 0180 SPY 52 REFLECTOR 20°

☐

19810 0190 SPY 52 REFLECTOR 45°

☐

19810 0240 SPY 52 REFLECTOR 30°

☐

Notes: